


Matryce zaciskowe OS

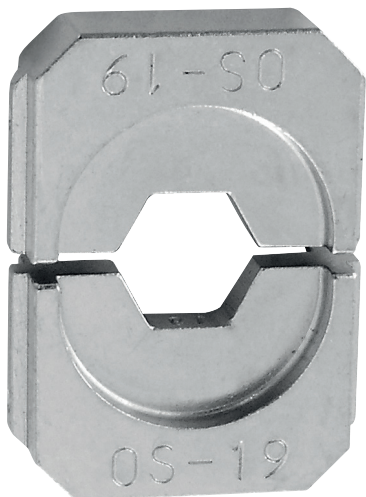


Do końcówek i złączek rurowych Cu 6 ÷ 300 mm², Al 16 ÷ 300 mm².

Typ matrycy	Wyróżnik	Przekrój przewodów [mm ²]				
		Rurowe Cu wg DIN	Rurowe Cu pozostałe	Rurowe Al wg DIN	Rurowe Al cienkościennie ARC, ALC	Rurowe Al grubościennie ARG, ALG, AFG
OS	6	10	6			
	7					
	8	16	16			
	9				16	
	10	25	25		25	
	12	35	35	16;25	35	16
	14	50	50	35	50	25
	16	70	70	50	70	35
	18	95	95	70	95	50
	19		120			
	20	120			120	70
	22	150	150	95; 120	150	95
	23		185		185	
	25	185	240	150		120
	28	240		185	240	150
	30		300			185
	32	300		240		
	34			300		240


- komplet podstawowy OS_K8 do końcówek wg normy DIN - 13 rozmiarów
- komplet rozszerzony OS_K-K7 - 18 rozmiarów

Rodzaj końcówek



KCR


Forma zaprasowania




Narzędzia dedykowane



PR 240

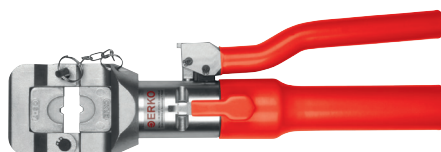

HR 300



GO 300