
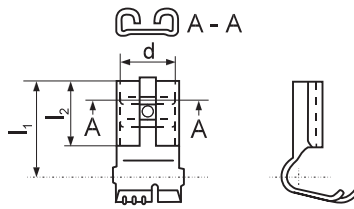



MK Angle terminal

for multi-wire Cu cables



Material: brass
According to DIN 46346 - part B

Cross section [mm ²]	Symbol	l ₁ [mm]	l ₂ [mm]	d [mm]	Cable insulation diameter	Weight [g/pce]	Unit [pcs]	Crimping tools
0,75 ÷ 1	MK 6,3-2	11	7,5	6,7	2 ÷ 3,3	0,69	100	SK1, PP8, PP19
1,5 ÷ 2,5 *	MK 6,3-2	11	7,5	6,7	2,7 ÷ 4,3	0,72	100	SK2N, PP8, PP19

* – outside DIN standard.

Standard production – non tinned. When ordering tinned add 'Sn' symbol e.g. MK 6,3-2 Sn.