


## WK Square hole punch

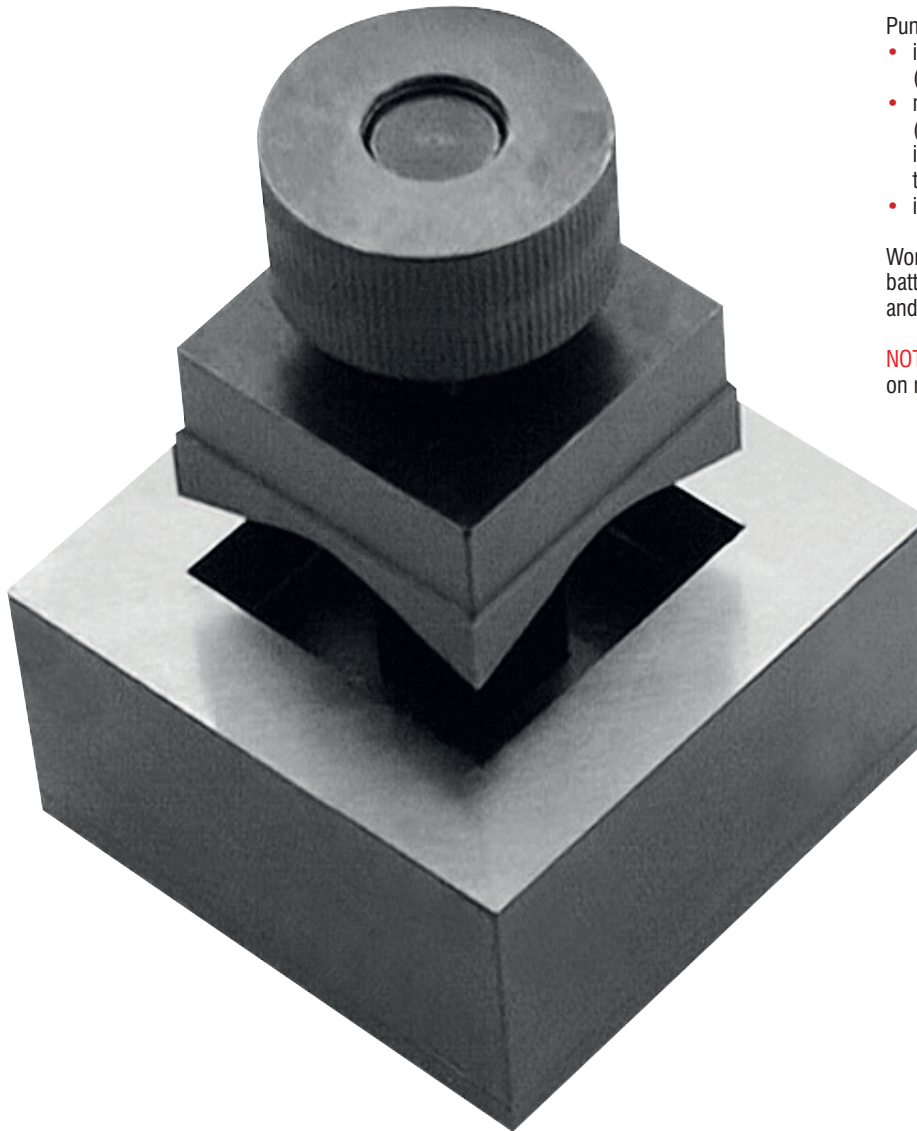

Punch for square hole punching:

- in sheet metal of switchgears, desktops (for mounting measuring devices)
- maximum sheet metal thickness up to 2 mm (at  $R_m < 450\text{MPa}$ , e.g. type St3S) if using GW or GW\_2 heads, maximum sheet metal thickness up to 3 mm
- initial hole diameter 23 mm

Works with GW and GW 2 hydraulic heads and with battery powered punches: EWHE 80, WHE 80, WH 100 and WHP 1.

**NOTE:** Different dimensions up to 140 x 140 mm on request. Punch with pin.

Type	Hole dimensions [mm]	Weight [kg]
WK 26,5	26,5 x 26,5	1,4
WK 45,6	45,6 x 45,6	3,7
WK 68,6	68,6 x 68,6	4,3
WK 92,7	92,7 x 92,7	4,8